



Installing Kyocera KX Driver-Mac Version


- Download driver from link provided or from USB storage.
- Run the file.

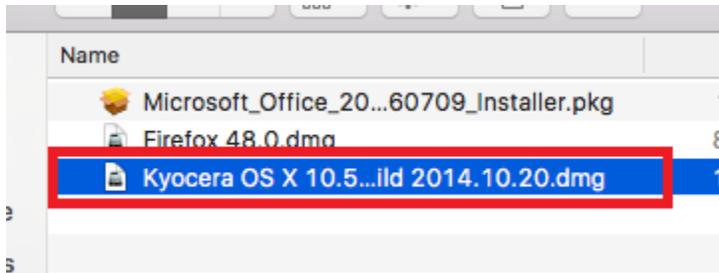


- The installer will open.
- Click Continue to begin.

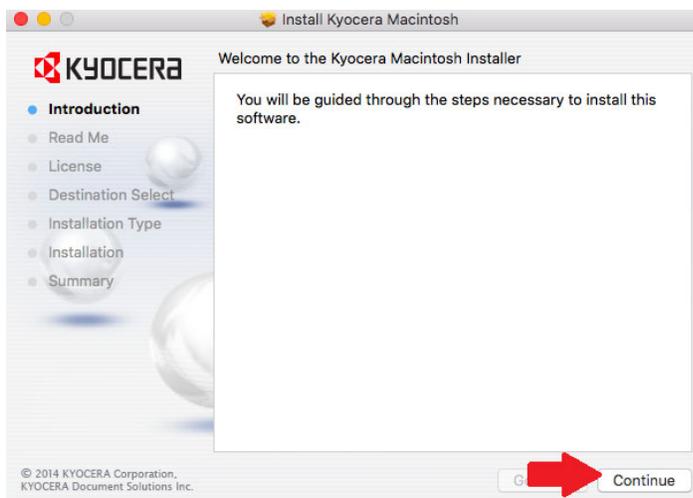


- Click Continue again.

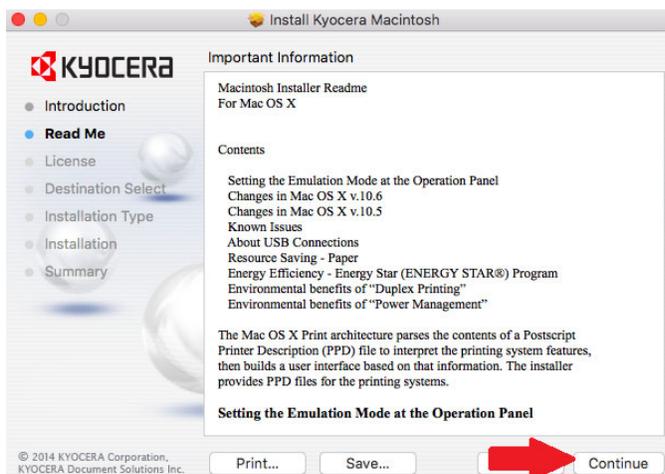


- Click Continue and Click Agree

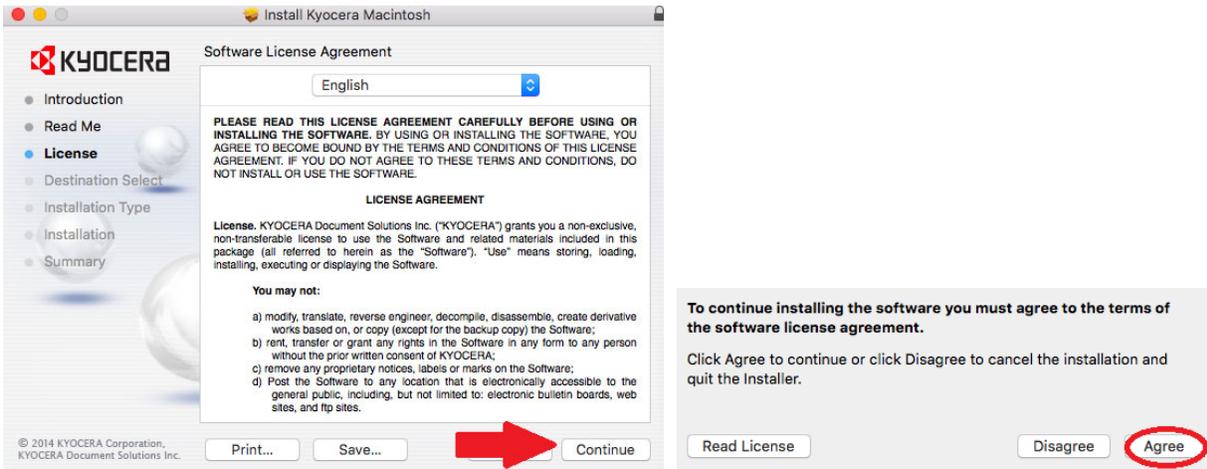


- Click Install to begin the installation of the driver.

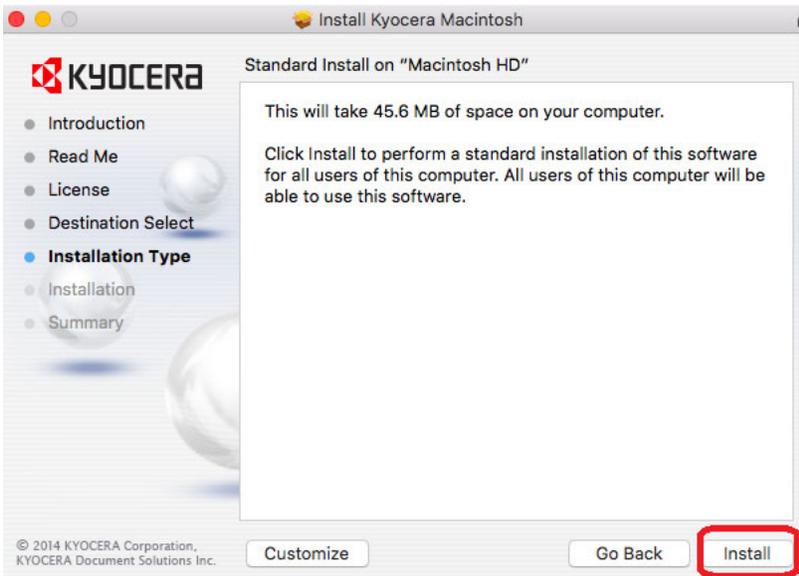

- Confirm your system Password and click Install Software.

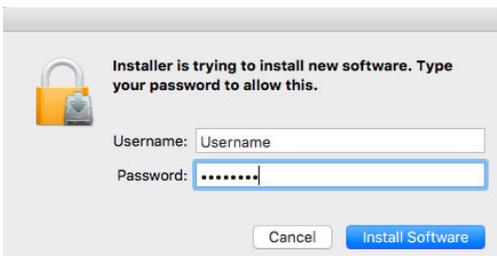


- Adding Printer to System.
- Go to System Preferences.

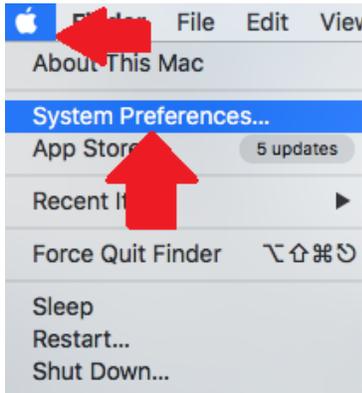


- Go to Printers & Scanners.




- Click the + to add a printer.

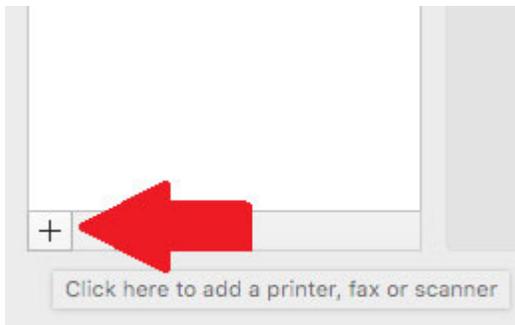


- Click IP Button on top menu.

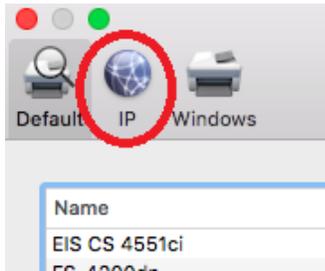

- Type the IP Address of the MFP in the Address field. **Obtain your MFP IP Address from the Status Page that can be printed from the operation panel. If instructions are needed they are available.**

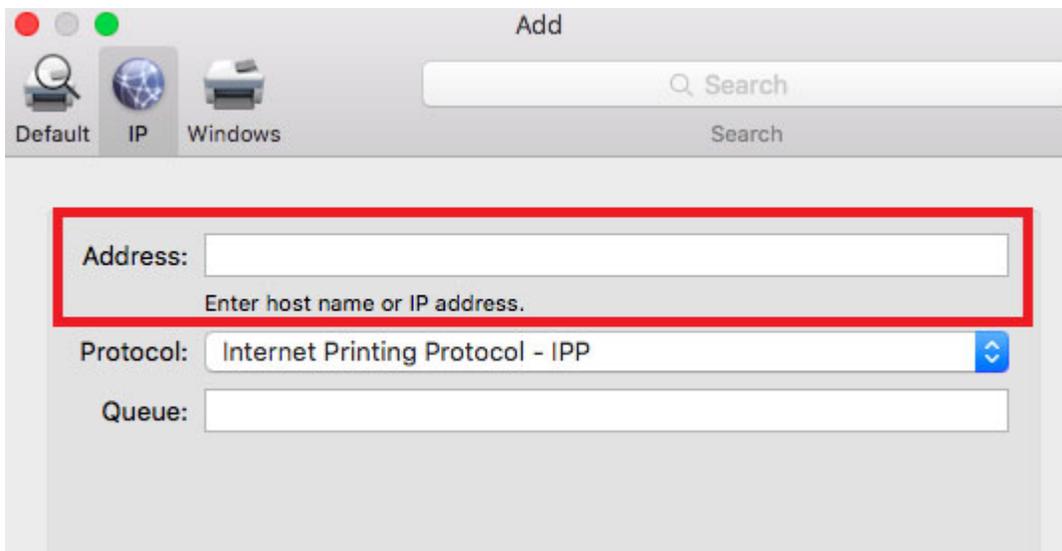

- Change the Protocol to HP Jetdirect-Socket.

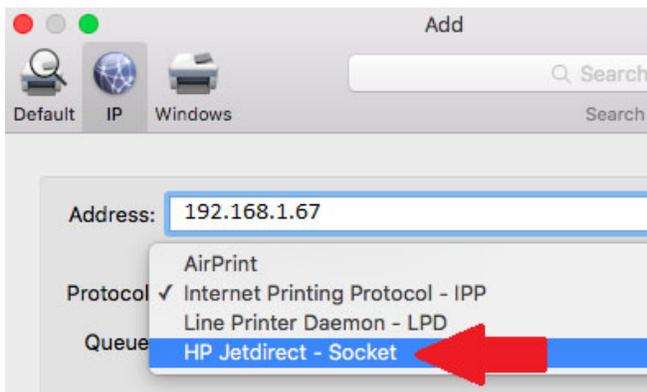


- Type in the name of the printer in the Name field.


Name:

Location:

- Click Add to complete the printer install.



- Highlight the printer and click Options & Supplies.

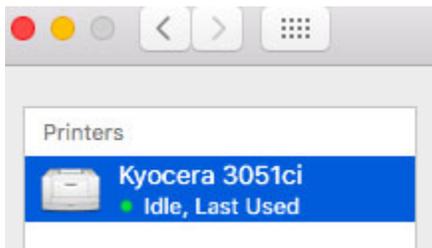

- Click Options button.

General **Options** Supply Levels


Name:

Location:

Device Name: Kyocera_3051ci

Driver Version: 8.3107

- Select the options that you have installed on your machine.

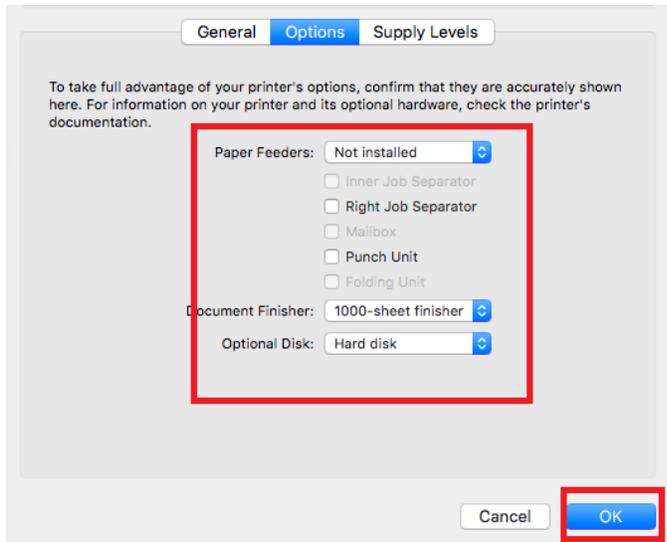


- Click OK when finished.

Setting Job Accounting and Setting Color Default


- Open an Adobe Document (PDF).




- Go to File and select Print.

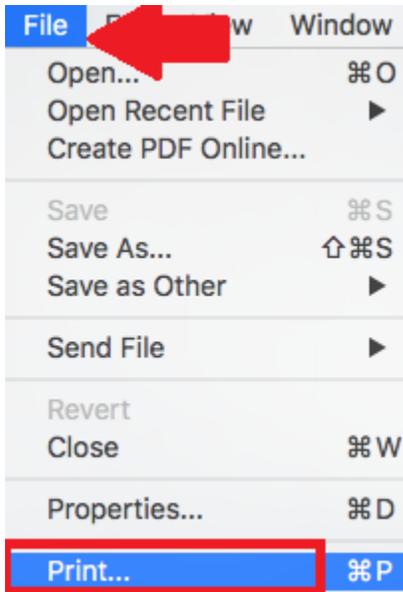


- Go to Printer button on bottom of window.

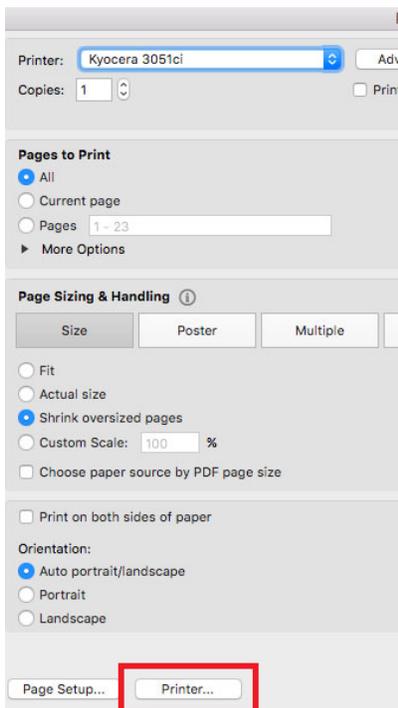


- Click Show Details button.

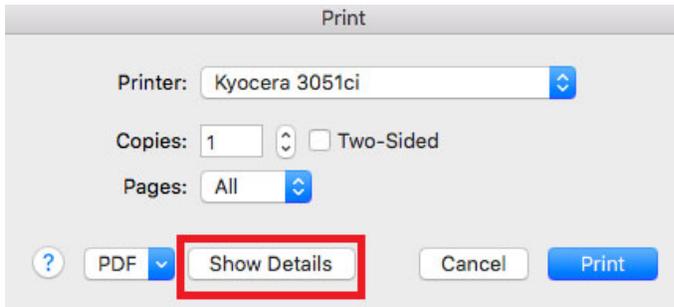


- Click Print Panel drop down and click Settings.

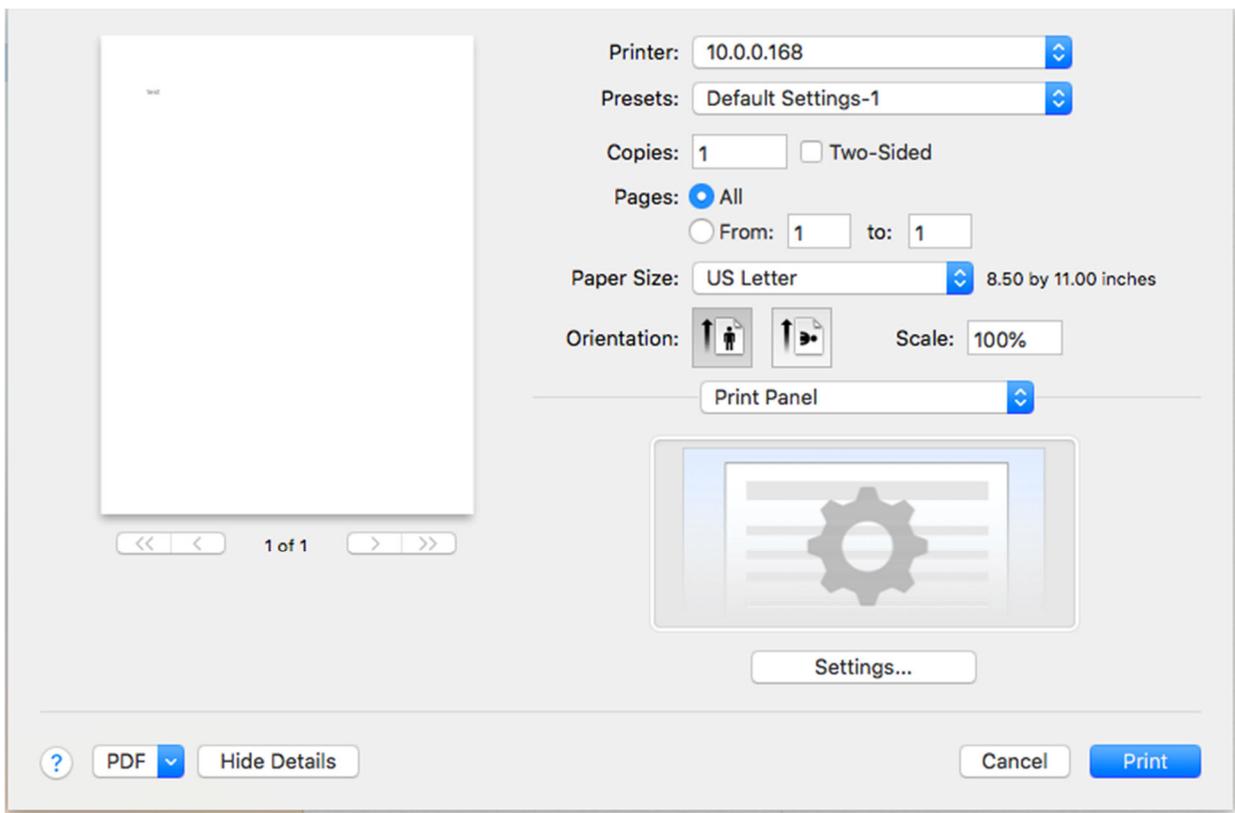


Select Job: Place a check in Job accounting and enter the code you were given

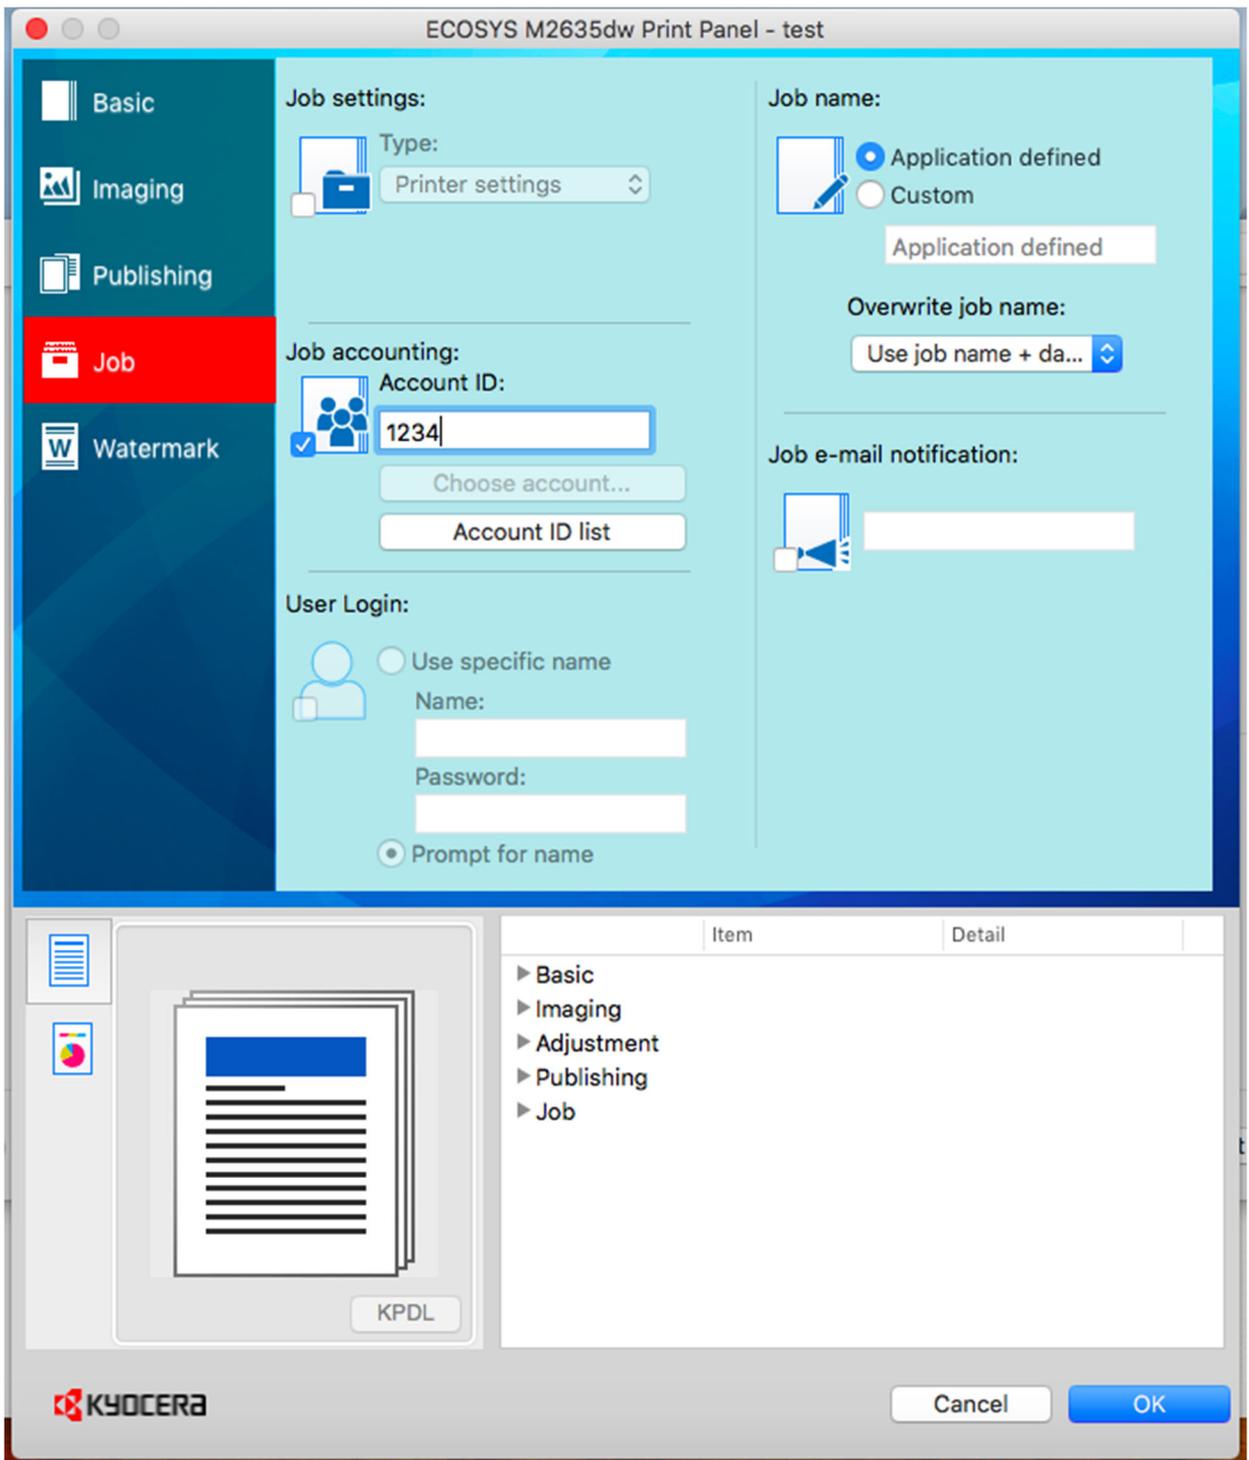

- Select basic in menu click Black and White to set default and click OK

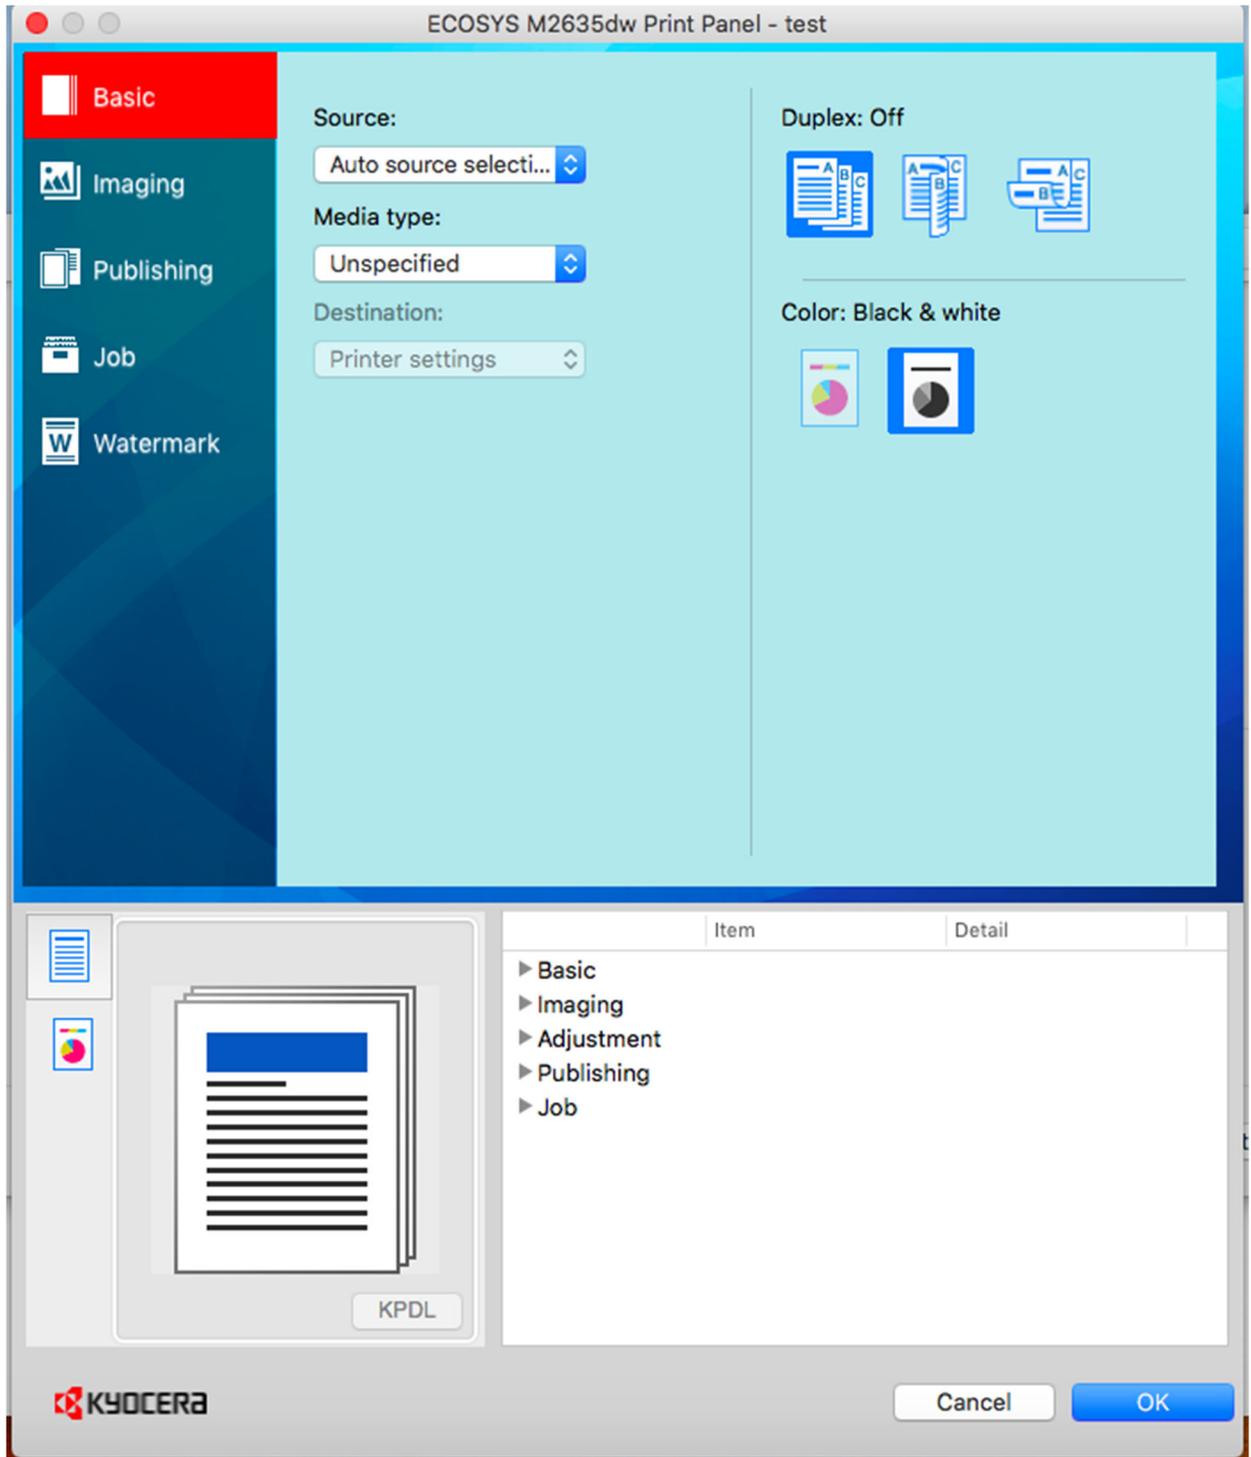

- In the Presets field use the drop down to Save Current Settings as Preset.

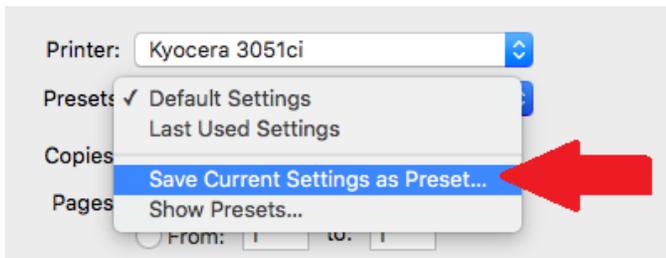

- Name the Preset Name. Click OK to save.

